


INDUSTRIAL HOSES - ducting and ventilation

Abrasion resistant hoses

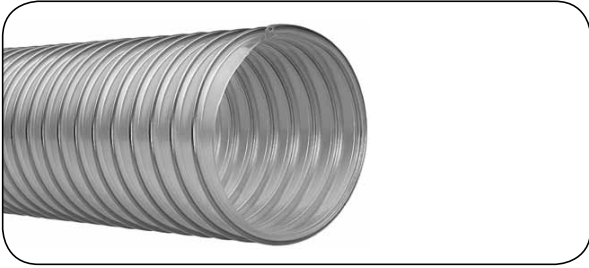

P 2 CNC

Material: Transparent polyether-polyurethane

Reinforcement: Steel wire helix

Working temp.: From -40°C up to +100°C

Flexible hose designed to extract oil fumes, dust, sawdust, light loose products, etc. Widely used in woodworking, construction industry, particularly recommended for CNC processing centers (woodworking). Flame retardant, compliant with DIN 4102 B1, resistant to hydrolysis and microbes. Free of halogens and plasticizers. Electrically conductive according to BGI 739-2 by grounding the wire. Other diameters available in the range of 80 ÷ 600 mm.

code	I.D. [mm]	wall thickness [mm]	working pressure [bar]	vacuum [bar]	bending radius [mm]	weight [kg/m]	standard length [m]
SC-P2CNC-080	80	0.65	0.35	0.2	80	0.65	10
SC-P2CNC-100	100	0.65	0.3	0.15	100	0.80	10
SC-P2CNC-120	120	0.65	0.3	0.12	120	0.95	10
SC-P2CNC-140	140	0.65	0.2	0.1	140	1.11	10
SC-P2CNC-160	160	0.8	0.2	0.08	160	1.79	10
SC-P2CNC-180	180	0.8	0.15	0.07	180	2.00	10
SC-P2CNC-200	200	0.8	0.15	0.05	200	2.22	10
SC-P2CNC-250	250	0.8	0.1	0.04	250	2.76	10
SC-P2CNC-300	300	0.8	0.05	0.03	300	3.30	10
SC-P2CNC-325	325	0.8	0.03	0.03	325	3.57	10
SC-P2CNC-350	350	0.8	0.02	0.02	350	3.84	10
SC-P2CNC-400	400	0.8	0.02	0.02	400	4.38	10
SC-P2CNC-450	450	0.8	0.01	0.01	450	4.92	10
SC-P2CNC-500	500	0.8	0.01	0.01	500	5.46	10
SC-P2CNC-600	600	0.8	0.01	0.01	600	6.53	10