

## INDUSTRIAL HOSES - air and water




### SAHARA BD®

**Internal layer:** White EPR rubber  
**Reinforcement:** Synthetic braid  
**External layer:** Blue EPDM rubber  
**Working temp.:** From -40°C up to +220°C  
 (with peaks up to +240°C)

Flexible, kink resistant hose designed for hot air transfer in industrial installations as well as in cement, feed and tank trucks, etc. External layer resistant to abrasion, ozone and weather conditions.

code	I.D. [mm]	O.D. [mm]	working pressure [bar]	bursting pressure [bar]	standard length [m]
IV-SAHARA-BD-025	25	41	10	30	120
IV-SAHARA-BD-032	32	48	10	30	120
IV-SAHARA-BD-038	38	54	10	30	120
IV-SAHARA-BD-040	40	56	10	30	120
IV-SAHARA-BD-051	51	69	10	30	120
IV-SAHARA-BD-060	60	78	10	30	120
IV-SAHARA-BD-063	63.5	82	10	30	120
IV-SAHARA-BD-076	76	94	10	30	120
IV-SAHARA-BD-090	90	108	10	30	120
IV-SAHARA-BD-102	102	125	10	30	120

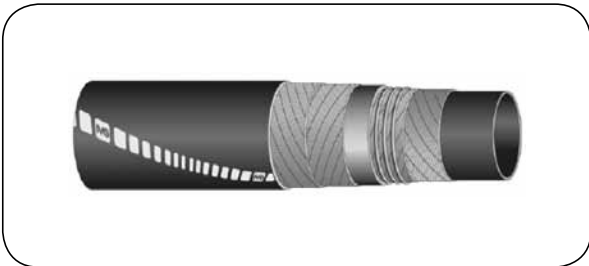

### SAHARA / LL BD®

**Internal layer:** White EPR rubber  
**Reinforcement:** Synthetic braid, steel wire helix  
**External layer:** Blue EPDM rubber  
**Working temp.:** From -40°C up to +220°C  
 (with peaks up to +240°C)

Flexible, kink resistant hose designed for hot air transfer in industrial installations as well as in cement, feed and tank trucks, etc. External layer resistant to abrasion, ozone and weather conditions.

code	I.D. [mm]	O.D. [mm]	working pressure [bar]	bursting pressure [bar]	standard length [m]
IV-SAHARA-LL-BD-025	25	37	10	30	120
IV-SAHARA-LL-BD-032	32	44	10	30	120
IV-SAHARA-LL-BD-038	38	50	10	30	120
IV-SAHARA-LL-BD-040	40	53	10	30	120
IV-SAHARA-LL-BD-051	51	64	10	30	120
IV-SAHARA-LL-BD-060	60	74	10	30	120
IV-SAHARA-LL-BD-063	63.5	77.5	10	30	120
IV-SAHARA-LL-BD-076	76	91	10	30	120
IV-SAHARA-LL-BD-090	90	105.5	10	30	120
IV-SAHARA-LL-BD-102	102	117.5	10	30	120