


INDUSTRIAL HOSES - steam

Accessories

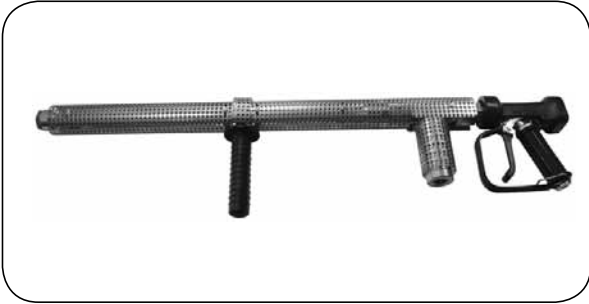

DSG - gun steam

Material: AISI 304 steel
Seals: O-rings: EPDM,
 Novapress flat seal
Working press.: To 10 bar (steam), to 15 bar (water)
Working temp.: +180°C (steam), +120°C (water)
Ambient temp.: From 0°C up to +40°C

A jet cleaner designed for steam and hot water. An insulated handle and perforated housing prevent accidental contact with hot metal parts. Widely used for cleaning equipment in pharmaceutical, food, cosmetic and chemical industry. Meets the requirements of ATEX Directive for operation in zone 1 and 2.

picture	code	connection	description
	RS-27407500016109	3/4" BSP female 3/4" BSP male - nozzle, jet extension connection	DSG steam and hot wa- ter gun.
	RS-27407500016001	3/4" BSP female	Fan nozzle. Flow rate: 26 l/min (at 10 bar pressure), Angle of spray: 25°.
	RS-27407500016002	3/4" BSP female	Spot nozzle. Flow rate: 43.3 l/min (at 10 bar pressure), Angle of spray: 0°.
	RS-27407500016003	3/4" BSP female	Cone nozzle. Flow rate: 31.7 l/min (at 8 bar pressure), Angle of spray: 45°.
	RS-27307500016029	3/4" BSP female 3/4" BSP male - nozzle connection	Jet extension - facilitates access to troublesome areas. Length: 600 mm.
	RS-27307500016042	fitted with screws at the front of the gun, where the jet nozzle is connected	Additional handle - used with jet extension.
	RS-5950750751160901	3/4" BSP female 3/4" BSP male	Swivel coupling - pro- tects the connected hose against twisting.
	RS-274075000101	-	Seal set for steam gun.