

# MACHINES AND ACCESSORIES - pneumatic accessories

## EWO hand tyre inflators



**PNEULIGHT**

pic.	code	connector	description
1	EW-471221	lever	Hand-held tyre inflator designed for inflating tyres with air. It is equipped with 63 mm pressure gauge (accuracy class 1.6) in a rubber protection cover. This tyre inflator cannot be calibrated. A full range of accessories and spare parts is available (see: Hand tyre inflators - accessories). Material: blue polyamide (PA6 GK30). Connection: EUROSTANDARD 7.2 plug. Max. working press.: 10 bar. Working temp.: from -10°C up to +50°C.
2	EW-471223	clip	
3	EW-471222	double-sided push-on	
4	EW-471301	angle extension	



**AIRMASTER STANDARD**

pic.	code	connector	description
1	EW-356121	lever	Hand-held tyre inflator designed for inflating tyres with air and nitrogen. It is equipped with 63 mm pressure gauge (accuracy class 1.0) in a rubber protection cover with double scale (bar, psi). This tyre inflator cannot be calibrated. A full range of accessories and spare parts is available (see: Hand tyre inflators - accessories). Material: aluminium. Connection: EUROSTANDARD 7.2 plug (* - DN 6 hose tail). Working press.: up to 10 bar. Max. working press.: 12 bar. Working temp.: from -10°C up to +60°C.
2	EW-356123	clip	
3	EW-356122	double-sided push-on	
1	EW-356111*	lever	
2	EW-356113*	clip	
3	EW-356112*	double-sided push-on	

# MACHINES AND ACCESSORIES - pneumatic accessories

## EWO hand tyre inflators



pic.	code	connector	description
1	EW-356221	lever	Hand-held tyre inflator designed for inflating tyres with air and nitrogen. It is equipped with 63 mm pressure gauge (accuracy class 1.0) in a rubber protection cover with double scale (bar, psi). Calibrated - recalibration required every 2 years (Directive 86/217/EEC). A full range of accessories and spare parts is available (see: Hand tyre inflators - accessories). Material: aluminium. Connection: EUROSTANDARD 7.2 plug. Working press.: up to 10 bar. Max. working press.: 12 bar. Working temp.: from -10°C up to +60°C.
2	EW-356223	clip	
3	EW-356222	double-sided push-on	



pic.	code	connector	description
1	EW-245201	lever	Hand-held tyre inflator designed for inflating tyres with air and nitrogen. It is equipped with 80 mm pressure gauge (accuracy class 1.0) in a polyethylene protection cover with double scale (bar, psi). A calibrated version requires recalibration every 2 years (Directive 86/217/EEC). A full range of accessories and spare parts is available (see: Hand tyre inflators - accessories). Material: rubber-coated aluminium. Connection: EUROSTANDARD 7.2 plug. Working press.: up to 12 bar. Max. working press.: 12 bar. Working temp.: from -10°C up to +60°C. * without calibration.
2	EW-245261	clip	
3	EW-245211	double-sided push-on	
1	EW-245241*	lever	
2	EW-245271*	clip	
3	EW-245251*	double-sided push-on	

# MACHINES AND ACCESSORIES - pneumatic accessories

## EWO hand tyre inflators



EUROAIR

pic.	code	connector	operating pressure	description
1	EW-151200	lever	0 ÷ 4 bar (cars)	Hand-held tyre inflator designed for inflating tyres with air and nitrogen. Includes a pressure gauge 80 mm (accuracy class 1.0) in a polyethylene cover with double scale (bar, psi). A calibrated version requires recalibration every 2 years (Directive 86/217/EEC). A full range of accessories and spare parts is available (see: Hand tyre inflators - accessories). Material: aluminium. Connection: EUROSTANDARD 7.2 plug. Working temp.: from -10°C up to +60°C. * without calibration.
2	EW-151260	clip		
3	EW-151210	double-sided push-on		
1	EW-151201	lever	0 ÷ 12 bar (cars and trucks)	
2	EW-151261	clip		
3	EW-151211	double-sided push-on		
1	EW-151243*	lever	0 ÷ 25 bar (special vehicles, planes)	
3	EW-151253*	double-sided push-on		




EUROAIR  
DIGITAL

pic.	code	connector	description
1	EW-152201	lever	Hand-held tyre inflator designed for inflating tyres with air and nitrogen. Approved by PTB (National Metrology Institute of Germany). Includes a digital pressure gauge 80 mm (display resolution: every 0.05 bar) in a rubber protection cover. The display turns on automatically when inflating starts. It turns off after 20 seconds of stand-by. A full range of accessories and spare parts is available (see: Hand tyre inflators - accessories). Material: aluminium. Display: LCD (digits: 15 mm high). Power supply: lithium battery 3V CR2450. Connection: EUROSTANDARD 7.2 plug. Working press.: up to 12 bar. Working temp.: from -10°C up to +60°C. * without calibration.
2	EW-152261	clip	
3	EW-152211	double-sided push-on	
1	EW-152241*	lever	
2	EW-152271*	clip	
3	EW-152251*	double-sided push-on	

# MACHINES AND ACCESSORIES - pneumatic accessories

## EWO hand tyre inflators - accessories

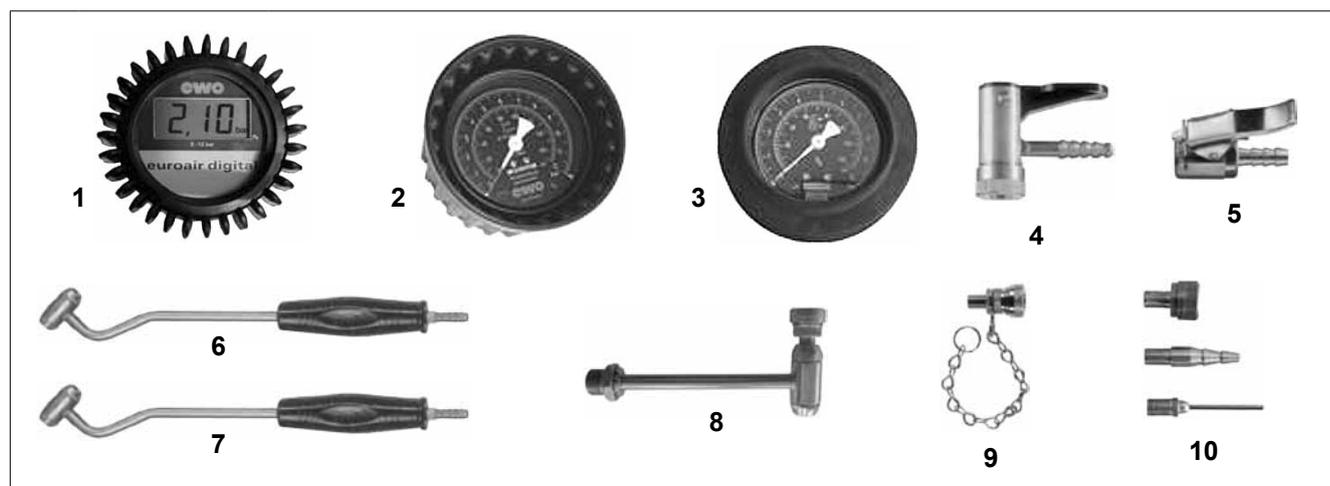

pic.	code	description
1*	EW-1523	Digital pressure gauge 80 mm, in a protection cover, 0 ÷ 12 bar.
2**	EW-151139	Pressure gauge 80 mm, in a protection cover, 0 ÷ 4 bar.
2**	EW-151140	Pressure gauge 80 mm, in a protection cover, 0 ÷ 12 bar.
2**	EW-151141	Pressure gauge 80 mm, in a protection cover, 0 ÷ 25 bar.
3***	EW-35619	Pressure gauge 63 mm, in a protection cover, 0 ÷ 10 bar.
4	EW-15125	Lever connector with a fitting for DN 6 mm hose, equipped with a special clip which holds the connector in the right position and with a pin to release the valve. A rubber seal and a metal cap is included. Supplied as a set with EAR CLIP clamp.
5	EW-151183	Clip connector with a fitting for DN 6 mm hose, equipped with a special clip which holds the connector in the right position. Available as a set with EAR CLIP clamp.
6	EW-15151	Double sided push-on connector with a fitting for DN 6 mm hose, enables inflating tyres from the inside or outside of a wheel. A very comfortable handle facilitates operation. The connector has no special clips, the length is well adjusted to allow easy and convenient access to a hard-to-reach tyre valve. Supplied as a set with EAR CLIP clamp.
7	EW-151K50	Double sided push-on connector designed to be attached to a clip connector. It enables inflating tyres from the inside or outside of a wheel. A very comfortable handle facilitates operation. The connector has no special clips, the length is well adjusted to allow easy and convenient access to a hard-to-reach tyre valve.
8	EW-471K24	90° angle extension for bicycle and car valves, mounted directly to the body of PNEULIGHT tyre inflator. Ends with BSP 1/4" male thread connection. It has a rubber seal and a metal cap with 6 mm hole diameter at one end, and a plug with rubber seal and 8 mm hole diameter at the other end.
9	EW-35618	A bicycle nipple with a chain, mounted to a clip connector. A rubber seal and a metal cap with 8 mm hole diameter is included.
10	EW-471K17	A set of three nipples, mounted directly to a clip connector. Intended to inflate air mattresses, balls, bicycle tyres and car tyres.

\* - for EUROAIR DIGITAL hand tyre inflator.

\*\* - for EUROAIR hand tyre inflator

\*\*\* - for PNEULIGHT, AIRMASTER STANDARD, AIRMASTER PREMIUM hand tyre inflators.

# MACHINES AND ACCESSORIES - pneumatic accessories

## Automatic tyre inflators



### AIRQUICK

**Tank:** 6 liters capacity,  
**Max. pressure:** 16 bar  
**Press. gauge:** Ø 160 mm, 0 ÷ 10 bar  
**Weight:** 7.1 kg  
**Working temp.:** From -10°C up to +60°C

A portable device for mobile operations. Equipped with an air tank allows to inflate the tyres of cars, trucks and motorcycles. Large pressure gauge is fitted at 20° angle to facilitate correct pressure readings. A built-in air tank allows operation independent of compressed air supply. Tank approval number CE 2004-0036.

code	connector	description
EW-35020	double-sided push-on	AIRQUICK tyre inflator, calibrated
EW-35021	double-sided push-on	AIRQUICK tyre inflator, without calibration
EW-35013	-	AIRQUICK tank filling valve, 1/2" male thread
EW-35016	-	AIRQUICK tank filling valve with elbow, 1/2" female thread
EW-600	-	Pressure gauge for AIRQUICK device, 160 mm 0 ÷ 10 bar
EW-350K161	double-sided push-on	Hose with handle and AIRQUICK connector for inflating, L = 1 m



### AIRMATE / PNEUMATE

**Material:** Housing - aluminium  
 Display - polycarbonate  
**Voltage:** 90 ÷ 230 V / 50 ÷ 60 Hz (adjustable)  
**Power:** 16 W  
**Protection class:** IP 54  
**Accuracy:** ± 0.5%  
**Weight:** 2.5 kg  
**Dimensions:** Ø 240 x 100 mm  
**Working temp.:** From -40°C up to +70°C

A stationary electronic tyre inflator for various vehicles - automatically inflates the tyres according to the target pressure value setting. Suitable for indoor and outdoor operation, resistant to weather conditions. Available in two versions: AIRMATE for petrol stations and PNEUMATE with more functions (e.g. inflating with nitrogen) designed for service stations, tyre fitting, repair and replacement services, vehicle inspection stations, etc. Approved by PTB (National Metrology Institute of Germany) and CE marked. A hose with a connector for tyres, and other accessories must be ordered separately.

code	max. filling pressure [bar]	supply pressure [bar]	description
EW-47710	5.5	7 ÷ 16	AIRMATE stationary tyre inflator.
EW-47730	10	12 ÷ 16	AIRMATE stationary tyre inflator.
EW-47720	10	12 ÷ 16	PNEUMATE stationary tyre inflator.
EW-477K34	-	-	Rubber hose DN 6, L=10 m with tyre connector.
EW-477K29	-	-	PVC hose DN 6, L=10 m with tyre connector.
EW-477K35	-	-	PVC hose DN 6.5, L=10 m with tyre connector.
EW-477K43	-	-	PU spiral hose DN 6.5, L=5 m with tyre connector.
EW-477K42	-	-	PU spiral hose DN 6.5, L=2.5 m with tyre connector.
EW-477K31	-	-	Connector for tyre inflating.